


Technical Data Sheet BENSTEN K basalt masonry grid

Reinforcement of brickwork, foundations, for indoors water-proofing

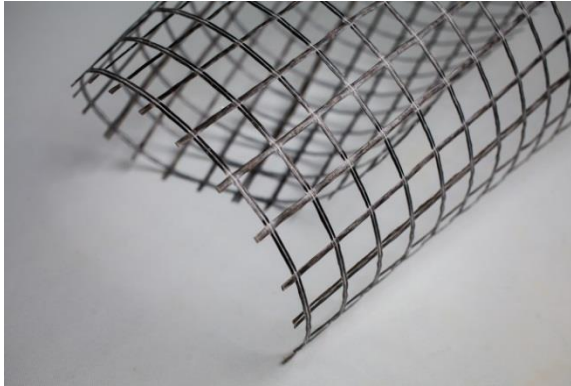

BENSTEN K basalt masonry grid is a flat rolled reticulate material comprising elastic ribs of high-tensile basalt rovings bound together with a knitting yarn at the nodes to form rectangular mesh. The grid is impregnated with special agents to improve its properties and enhance its stability. Mesh size depends on intended purpose of a grid.

Typical application: BENSTEN K masonry grid is intended:

- for reinforcement of horizontal brickwork joints in order to increase their load-bearing capacity and integrity during construction (in new construction), as well as during repair, reinforcement or renovation of residential and municipal buildings which consist of various wall materials (calcium-silicate or ceramic bricks, foam concrete blocks, breeze blocks)
- for reinforcement of clay block walling systems with a hollowness exceeding 30% in order to save grout in mortar joints and ensure regulatory level of thermal conductivity of masonry walls
- as binding elements in multilayer brickworks while binding a layer of brick veneer with a main inner wall of various wall materials
- for reinforcement of foundations and floor cement screeds
- as reinforcement of waterproof finish in accommodation buildings (underground floors, swimming pools)

Advantages:

- Cheaper than metal mesh at equal tensile properties
- Basalt grids are easy to handle: the grids are lighter, space-saving, cause no injuries to hands, subject to high-level adherence to walls, cuttable to rolls of required width, effortlessly cuttable to required dimensions
- Not decayable, abrasion-resistant, resistant to rust, aggressive media which include alkali
- Dielectric – would not conduct electricity
- Thermally stable, absence of cold bridge effect
- Decreased masonry joint as compared to metal meshes.

Designation BENSTEN K 50/50-25 (100)

- BENSTEN K – designation of brand;
- 50/50 – designation of longitudinal/transverse tensile strength, kN/m;
- 25 – designation of mesh size, a × b, mm;
- 100 – designation of width of rolled materials, cm.

Technical Data Sheet

BENSTEN K basalt masonry grid

Reinforcement of brickwork, foundations, for indoors water-proofing


Physical and mechanical properties

Property	Unit	BENSTEN K 50/50-25	BENSTEN K 100/100-25	Testing method
Type of fiber		basalt	basalt	
Color		dark green	dark green	
Surface weight	g/m ²	200 (+20%/+15%)	370(+20%/+15%)	GOST 6943.16
Mesh size	mm	25x25±2 50x50±2	25x25±2 50x50±2	TY23.99.19-035- 00205009-2017
Tensile strength, longitudinal	κN/m	≥50	≥100	GOST 34275-2017 (EN 13496:2013)
Tensile strength, transverse	κN/m	≥50	≥100	GOST 34275-2017 (EN 13496:2013)
Relative elongation, longitudinal	%	≤4	≤4	GOST 34275-2017 (EN 13496:2013)
Relative elongation, transverse	%	≤4	≤4	GOST 34275-2017 (EN 13496:2013)
Impregnation		Transparent, polymer dispersion		
Width of a roll	cm	100±2%	100±2%	GOST 6943.16
Length of a roll	m	50±5%	50±5%	GOST 6943.16
Diameter of a roll	cm	18	24	
Weight of a roll including core pipe	kg	15	30	

Manufacture of the material with other physical and mechanical properties is accepted upon agreeing about with a consumer.

Technical Data Sheet**BENSTEN K basalt masonry grid**

Reinforcement of brickwork, foundations, for indoors water-proofing

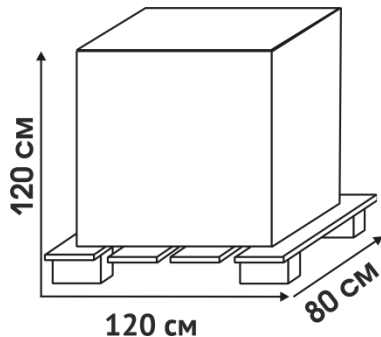**Packaging:**

The grid is supplied in 50 m rolls. Rolls of the grid are wrapped in polyethylene film and placed vertically in cardboard boxes. As much as 1500m² (30 rolls) can be placed on a single pallet.

Certificates:

- ✓ Certificate of conformity GOST R 57265-16 №0152226
- ✓ Certificate of conformity No 003444004
- ✓ Expert opinion No 1427τ/2017dd. 30.08.17

Regulatory documents:

- Technical specification TU 23.99.19-035-00205009-2017

Storage: store packed rolls vertically, max 3 pallets stacked, under a shelter or in a warehouse. Keep away from moisture, direct sunlight, atmospheric precipitation, and observe precautions against mechanical damage.

Manufactured by:

STEKLONIT JSC Tramvaynaya 15, Ufa, 450027. Tel.: +7 347 293-76-00

Moscow office Profsoyuznaya 23, Moscow, 117997. Tel.: 8 800 500-07-22

Tverstekloplastik, a branch of STEKLONIT JSC Pashi Savelievoj 45, Tver, 170039. Tel.: +7 482 255-35-52

www.steklonit.com, info@steklonit.com